

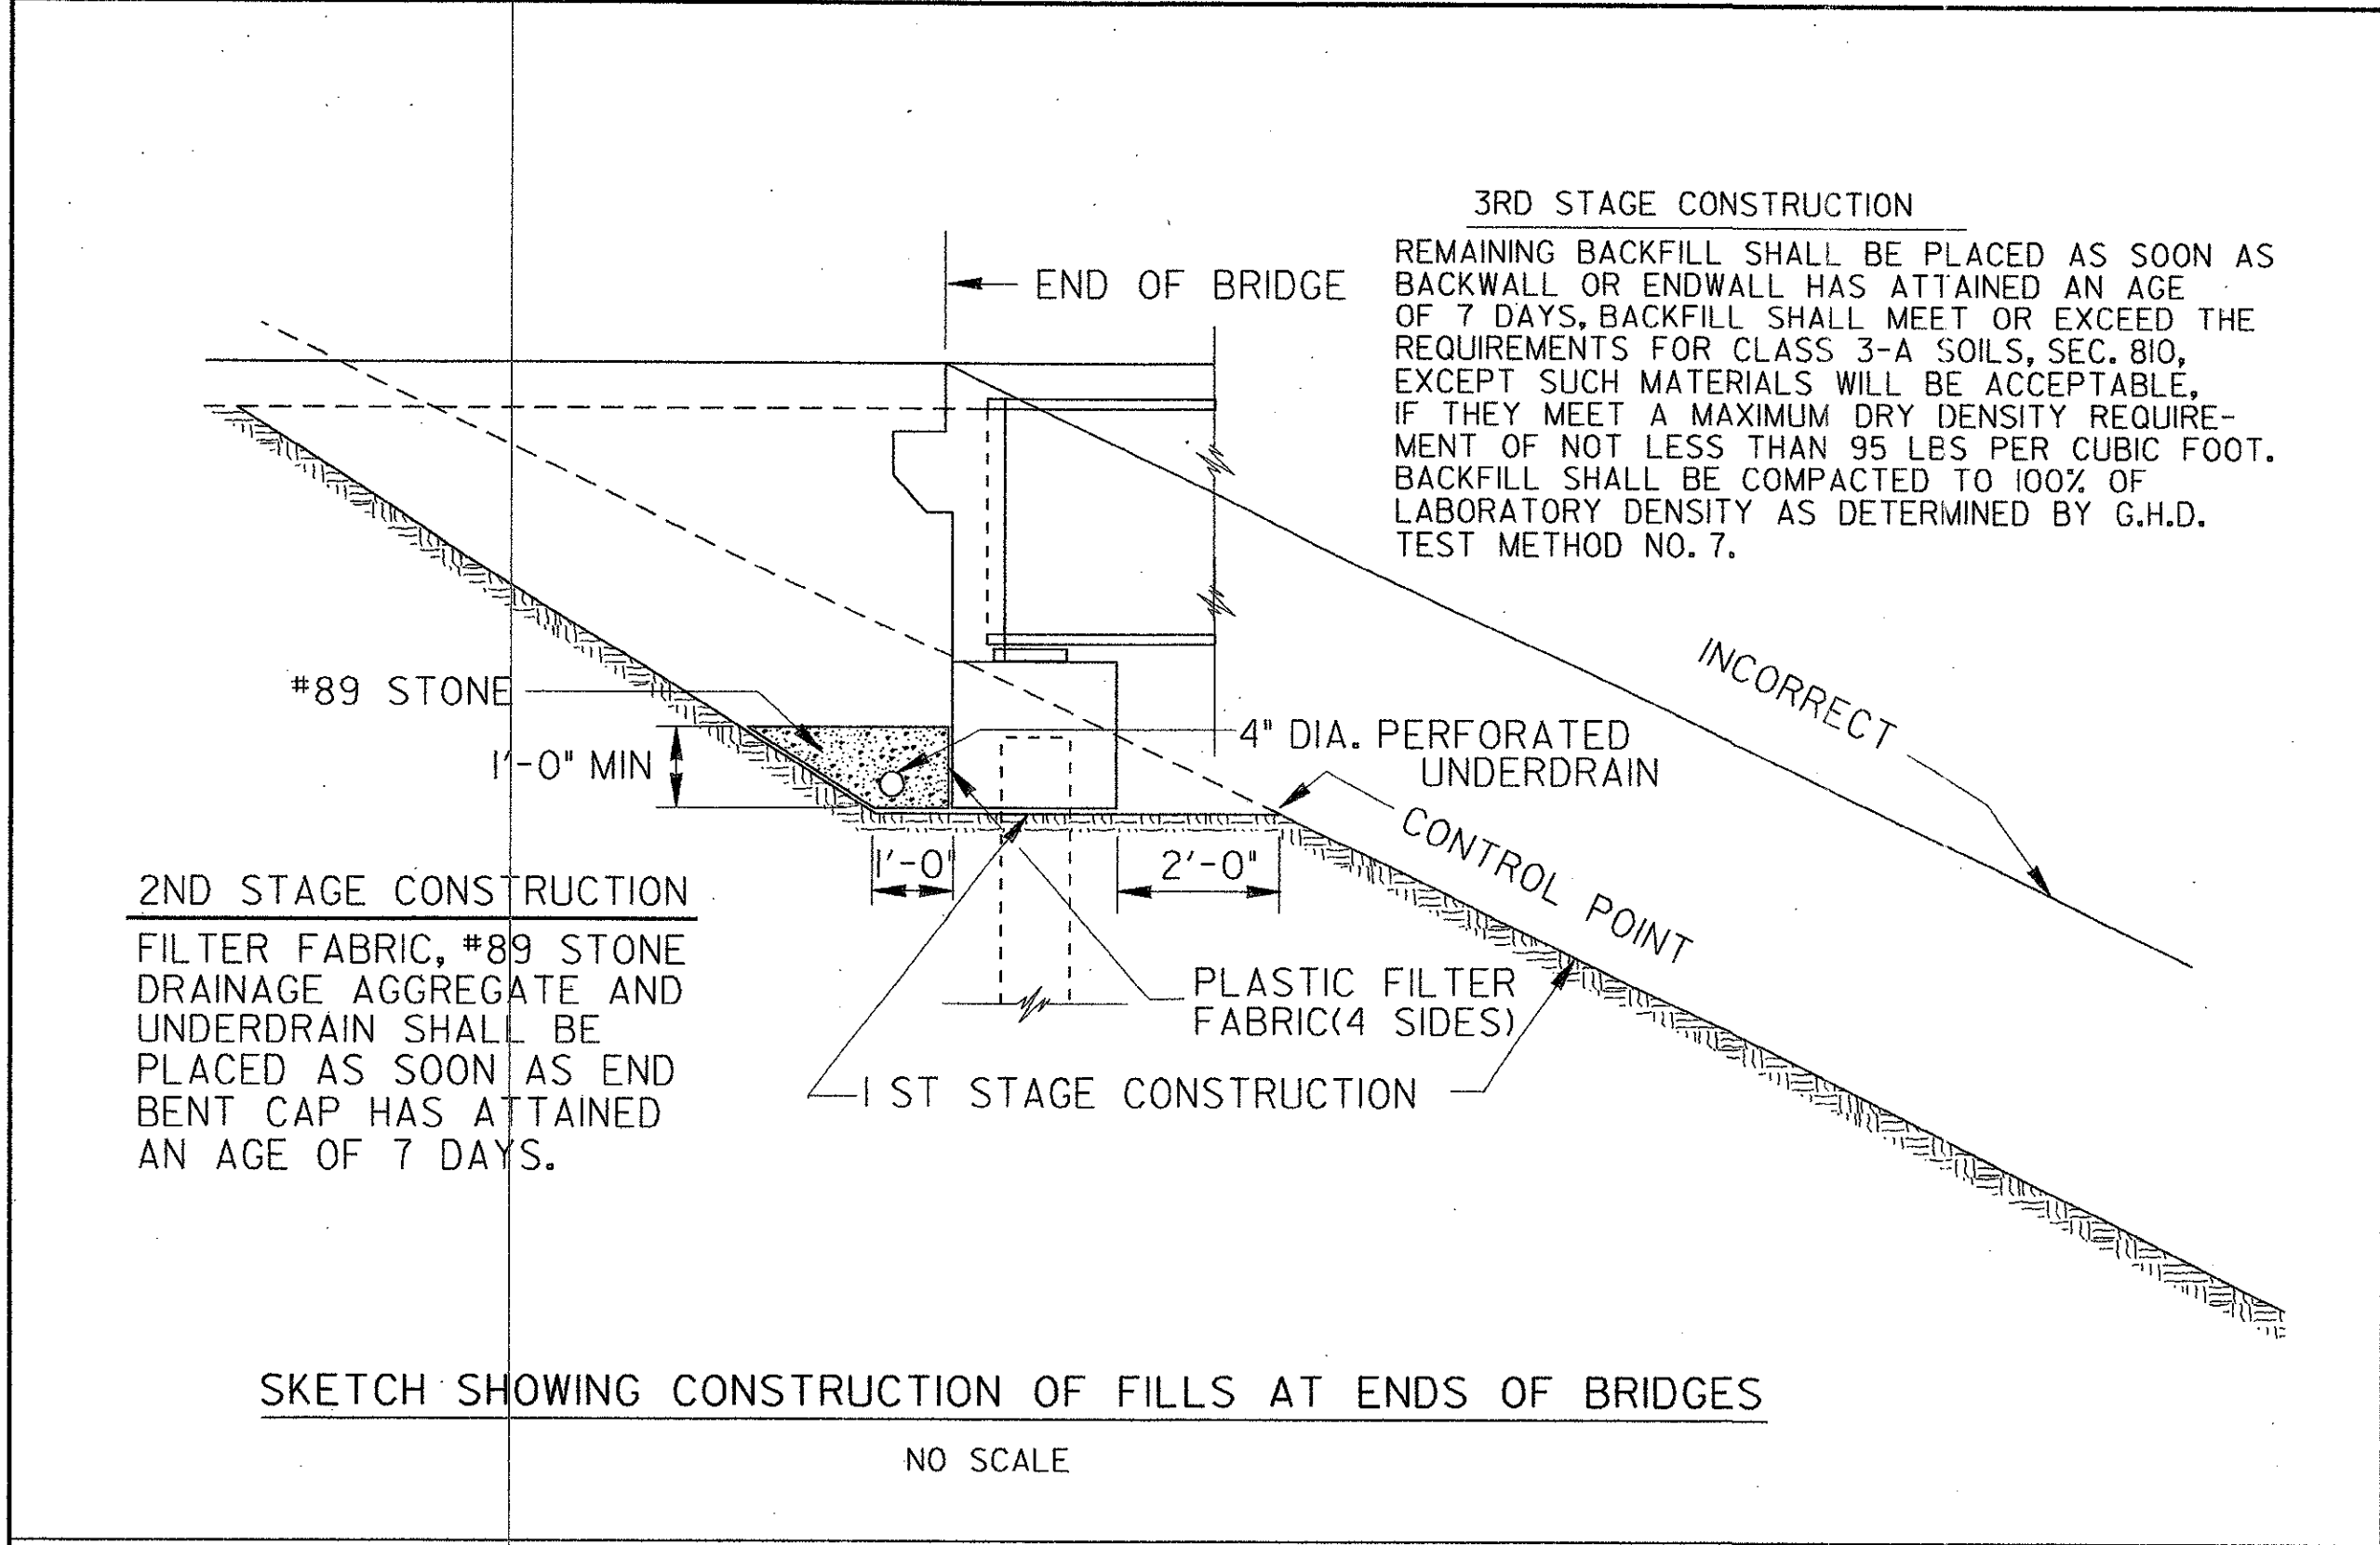
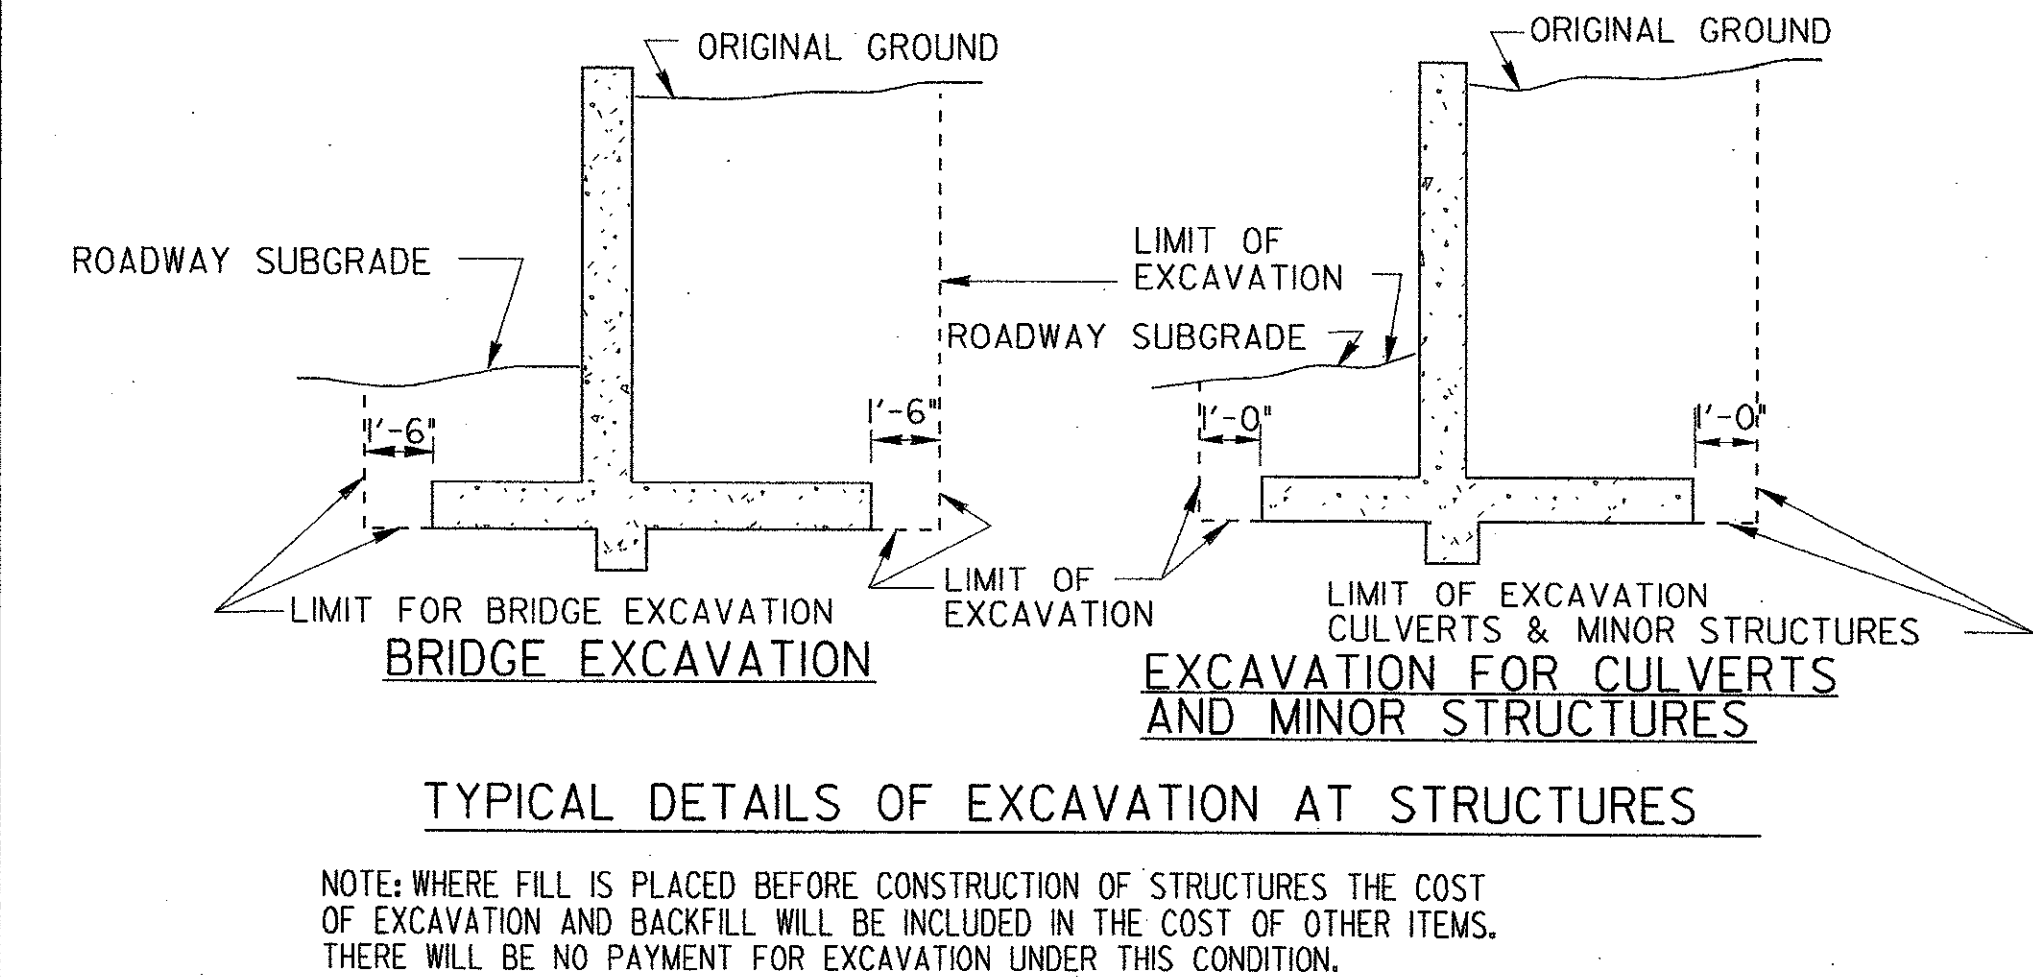
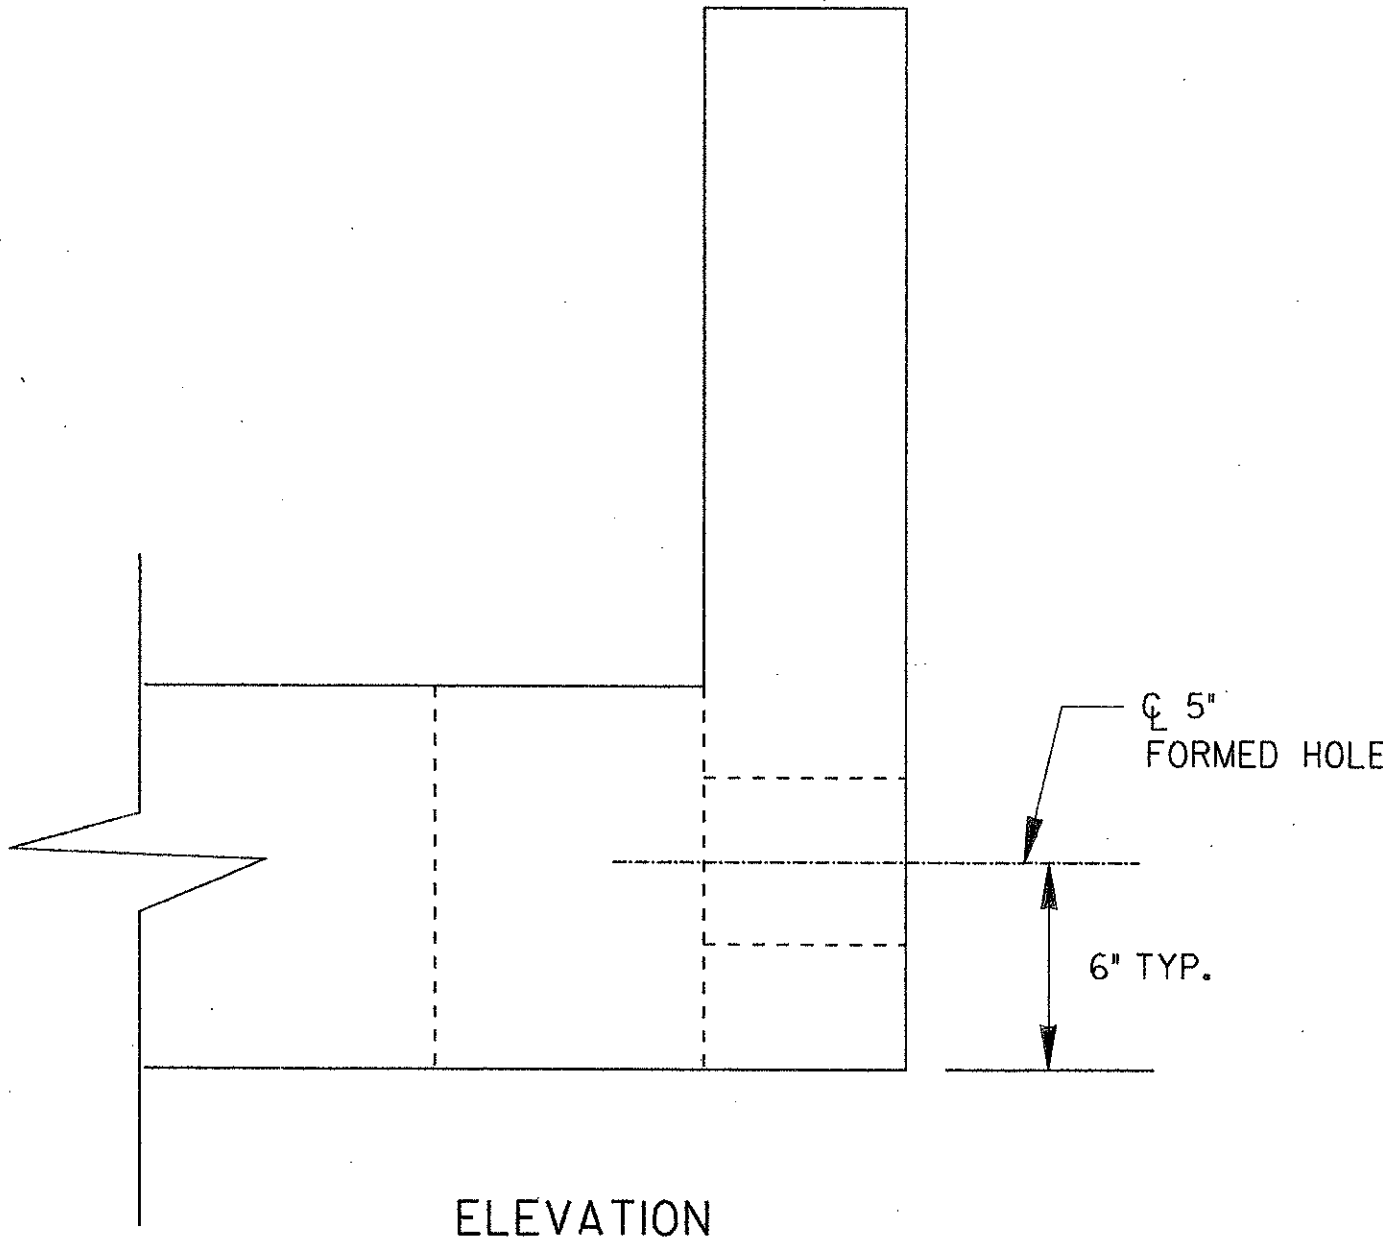


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.		56	109

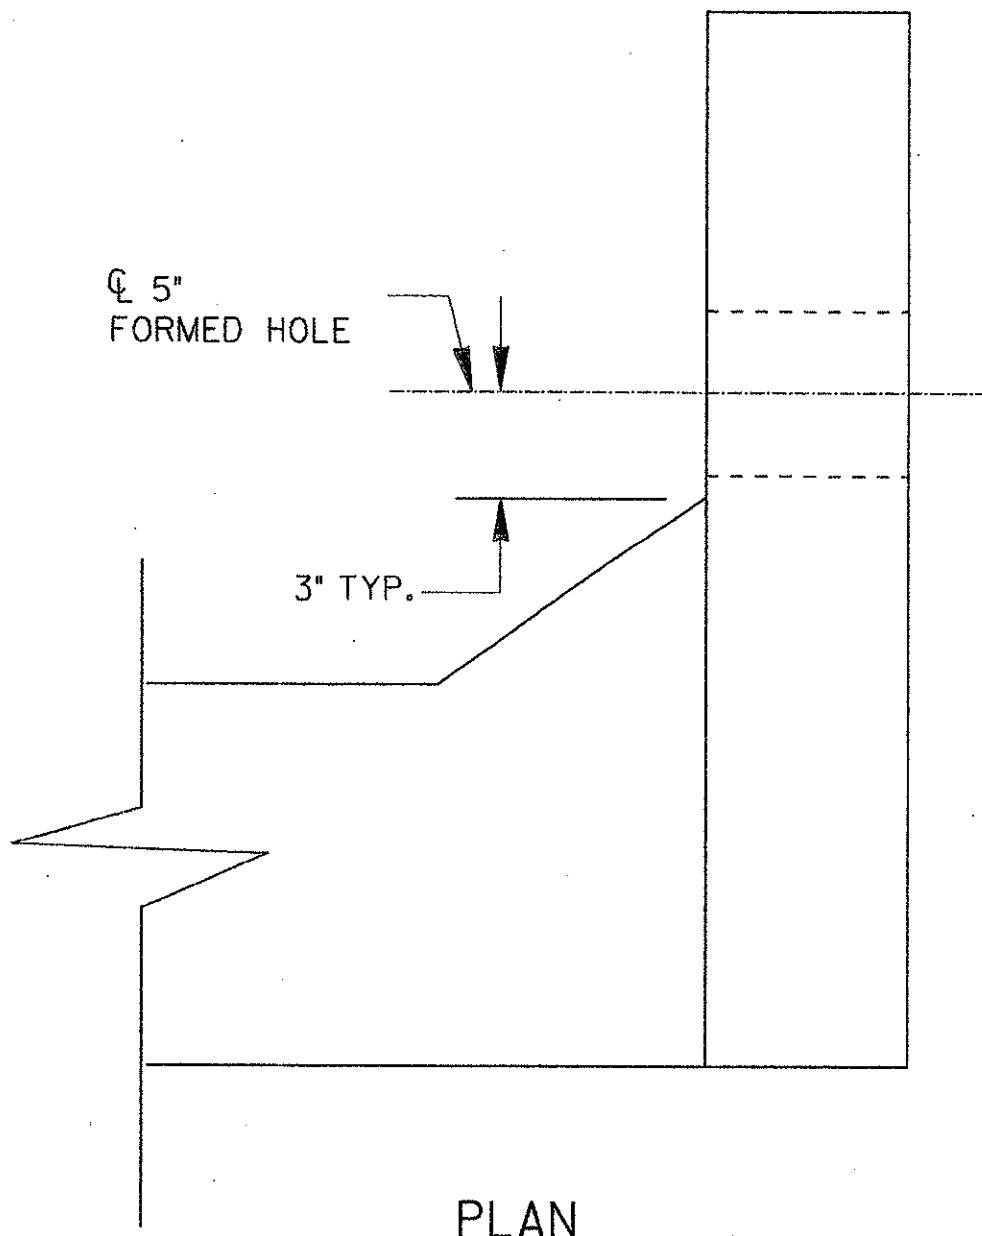

NOTES:

1. PERFORATED UNDERDRAIN SHALL EXTEND TO THE INSIDE FACE OF WING AT THE HIGH END OF THE CAP.
2. AT THE LOW END OF THE CAP, CONNECT PERFORATED UNDERDRAIN TO A COMPATIBLE SOLID PIPE FROM THE INSIDE FACE OF WING UNTIL IT EXITS THE SLOPE. SOLID PIPE SHALL HAVE A MINIMUM SLOPE OF 2%.
3. SOLID PIPE MAY BE PLACED AT EITHER END OF CAPS WITH LEVEL BOTTOM.
4. PERFORATED UNDERDRAIN SHALL BE INSTALLED PARALLEL TO BOTTOM OF CAP. LOW POINTS OR SAGS THAT MAY TRAP WATER WILL NOT BE ALLOWED.
5. FILTER FABRIC SHALL NOT BE ATTACHED TO THE END BENT CAP.
6. COST FOR PROVIDING AND INSTALLING FILTER FABRIC, UNDERDRAIN, AND STONE SHALL BE INCLUDED IN THE PRICE BID FOR CONTRACT ITEMS.

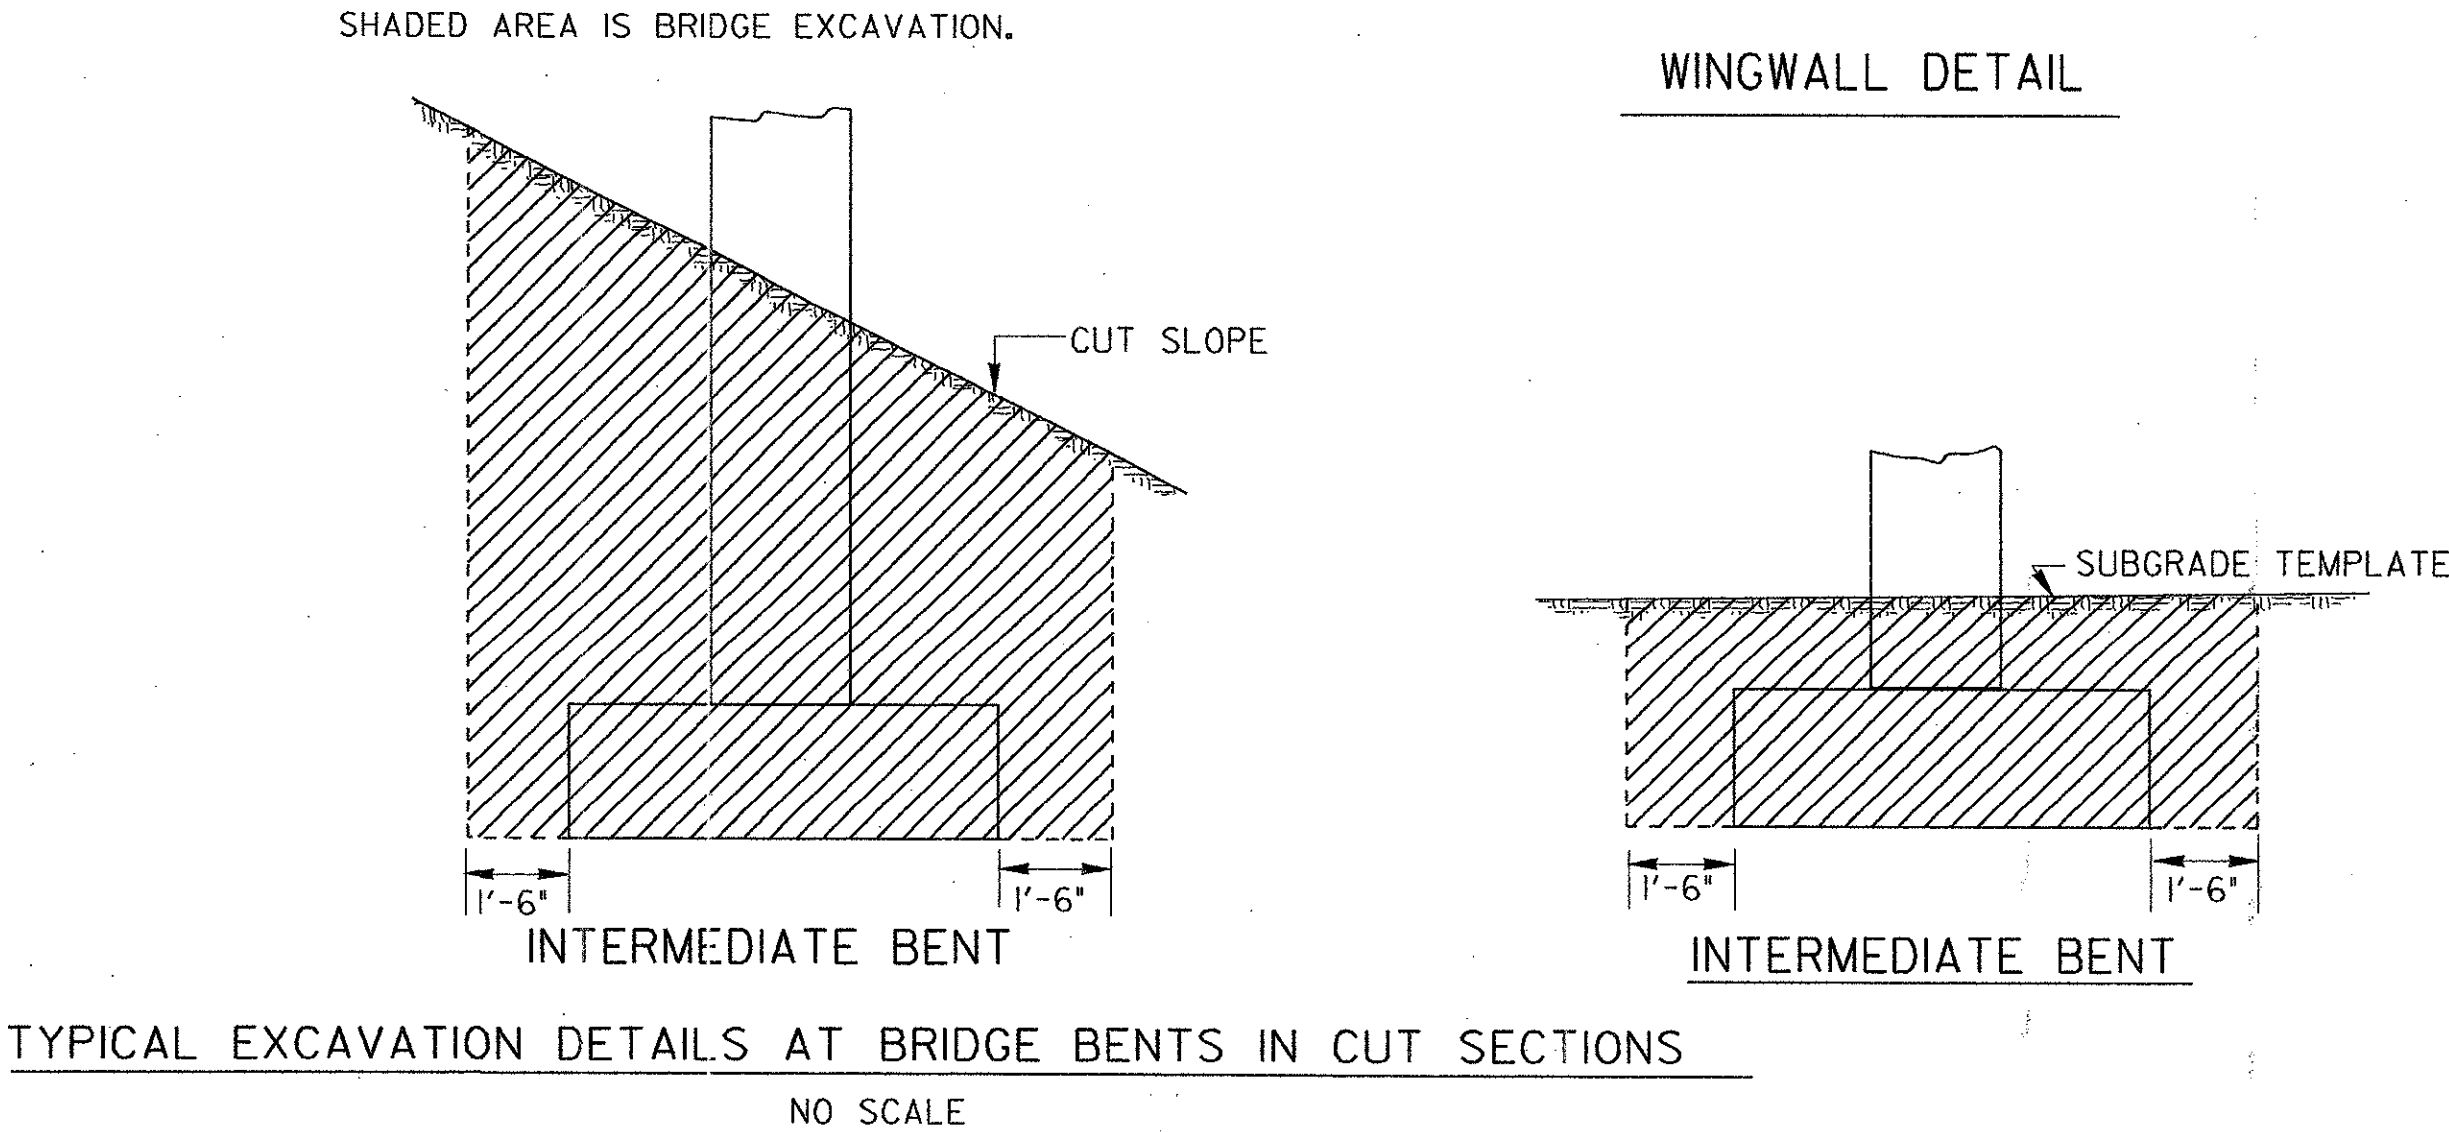

DEPARTMENT OF TRANSPORTATION			
STATE OF GEORGIA			
STANDARD			
TYPICAL FILL DETAIL AT END OF BRIDGE			
NO SCALE	REVISION	DATE	REDRAWN SEPT., 1999
DES. (SUBMITTED)	BY	DATE	NUMBER
DRW. (APPROVED)			9037
TRA. (APPROVED)			
CHK. (APPROVED)			
CHIEF ENGINEER			